



Shenzhen JSK Science & Technology Co.,Ltd.

SMD kHz Crystals 2.0x1.2x0.6mm 2012 Series



Features

- 2 pads surface mount package.
- Applications in mobile phone ,Notebook and DSC
- High reliable environmental performance.




Electrical Specifications

Item / Type	
Norminal Frequency	32.768 kHz
Frequency Tolerance(at 25 °c)	± 20 ppm
Operation Temperature Range	- 40 ~ + 85 °c
Shunt Capacitance (C0)	1.3pF typical
Motional Capacitance (C1)	6.4fF typical
Insulation Resistance (IR)	500 MΩ Min.
Drive Level (DL)	0.5 μW Max.
Load Capacitance(CL)	7pF,12.5 pF ,
Turnover Temperature (Ti)	25 °c ± 5 °c
Parabolic Coefficient (B)	$(-0.03 \pm 0.01) \times 10^{-6} / ^\circ\text{C}^2$
Aging (at 25 °c)	± 3 ppm at First year
Storage Temperature Range	-55 ~ +125 °c

Equivalent Series Resistance(ESR)

2012
80 KΩ Max

Dimensions

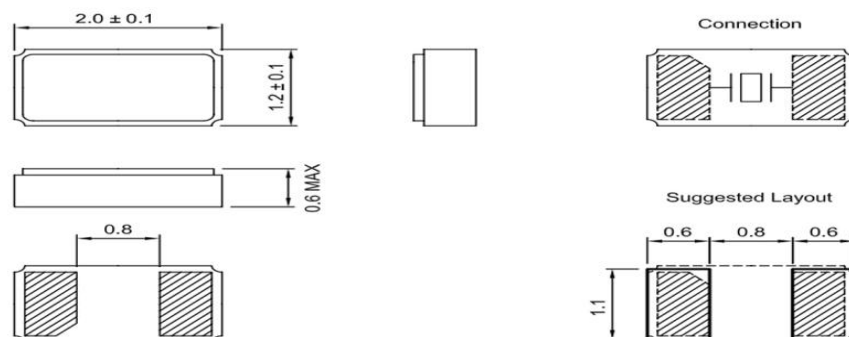

Units: mm

WWW.JSKSZ.COM TEL:+86-755-83559339/83551725 FAX: +86-755-83558980